

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number
WO 2005/039853 A2

(51) International Patent Classification⁷: **B29C 31/04**,
43/08, 43/34

Terme (IT). MARTELLI, Paolo [IT/TT]; Vicolo Canat-
tieri, 3, I-48022 Lugo (IT). PUCCI, Fabrizio [IT/TT]; Via
2 Agosto 1980, 8, I-40023 Castel Guelfo (IT).

(21) International Application Number:
PCT/EP2004/011968

(74) Agent: LUPPI, Luigi; Luppi & Associati S.R.L., Foro
Buonaparte, 68, I-20121 Milano (IT).

(22) International Filing Date: 22 October 2004 (22.10.2004)

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
MO2003A000289 23 October 2003 (23.10.2003) IT

(71) Applicant (*for all designated States except US*):
SACMI-COOPERATIVA MECCANICI IMOLA-SOC.
COOP.A R.L. [IT/TT]; Via Selice Provinciale, 17/A,
I-40026 Imola (IT).


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): BERGAMI, Stefano
[IT/TT]; Via Madonnina, 1715, I-40024 Castel San Pietro

[Continued on next page]

(54) Title: APPARATUSES, METHODS AND ITEM

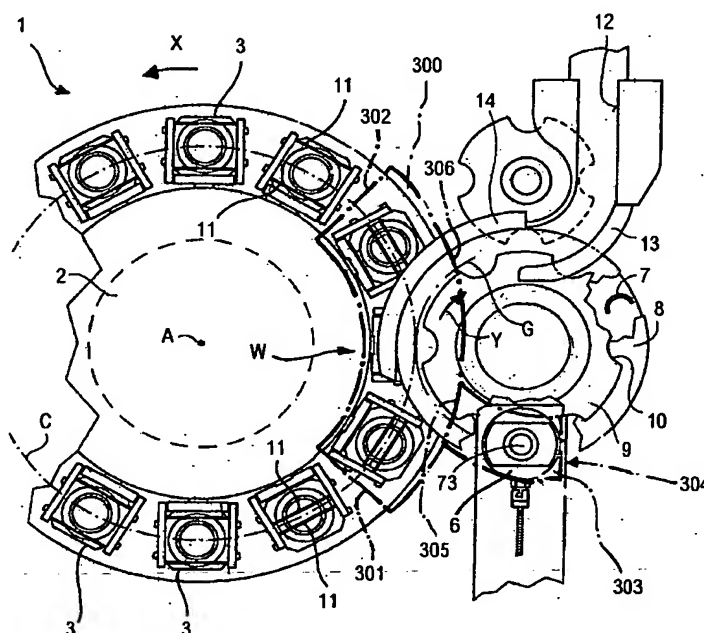

(57) Abstract: An apparatus comprises a moulding unit (3; 3a) having a punch (5; 5a) and a mould cavity (4; 4a) movable along a path between an open position in which said punch (5; 5a) and said mould cavity (4; 4a) are distanced apart from each other to receive a dose (D) of plastics therebetween, and a closed position in which said punch (5; 5a) and said mould cavity (4; 4a) interact to form an item by pressing said dose (D), said punch (5; 5a) being kept not above said cavity (4; 4a) along said path.

WO 2005/039853 A2



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,*

BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US*
- *of inventorship (Rule 4.17(iv)) for US only*

Published:

- *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.